




**WELLVALVE**

PN 125LB  
ANSI  
DN50...DN350



法兰Y型过滤器(美标)  
Y-STRAINER(FLANGE)

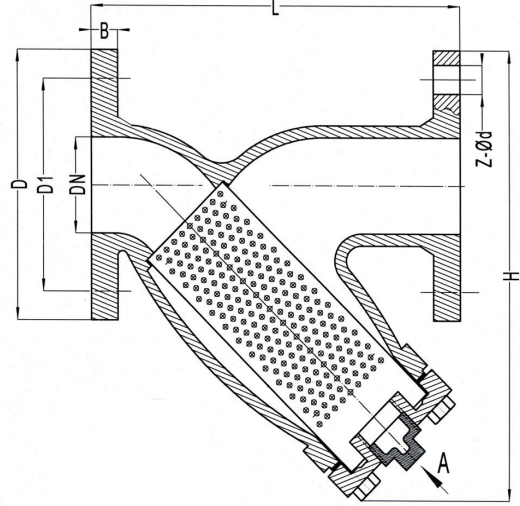

**TEMPERATURE/PRESSURE**

°C	-10...+120	150
PN 16/10	16	13

**APPLICATIONS**

- Hot and cold water systems
- Fluid excluding acid

MATERIALS	
PART NAME	MATERIAL
BODY	CAST IRON (ASTM A 126, CLASS B)
SCREEN	STAINLESS STEEL (304)
GASKET	COMPOSITION
COVER	CAST IRON (ASTM A 126, CLASS B)
HEX HEAD CAP SCREWS	STEEL

**Structure**

DN	L	D	D1	A	B	Z-φd	H	KG
50	225	152	120	1/2	16	4-19	154	14
65	273	178	140	1/2	18	4-19	184	16
80	292	191	152	1/2	19	4-19	208	22
100	352	229	190	1/2	22	8-19	240	29
125	416	254	216	1/2	23	8-22	280	48
150	470	285	241	1/2	23	8-22	325	70
200	543	343	298	1/2	25	8-22	400	109
250	660	406	362	3/4	25	12-25	485	181
300	762	483	432	3/4	29	12-25	565	227
350	946	533	476	3/4	30	12-28	640	374

**JIANGSU WELL VALVE CO., LTD**

www.wellvalve.com

Email:wellvalve@wellvalve.com

TEL:+86 518 85202345 FAX:+86 518 85321234